




AISAFENIX



FOR THE MOST DEMANDING
GEOLOGICAL, LAW ENFORCEMENT AND
ENVIRONMENTAL APPLICATIONS

Swath width vs altitude from the ground

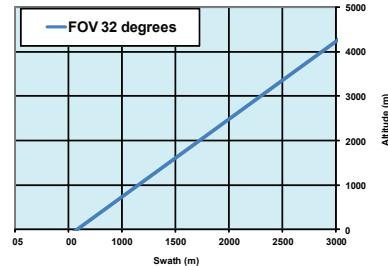

Ground pixel vs. altitude from the ground


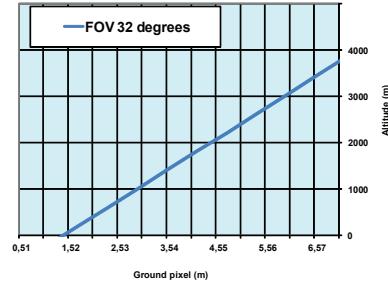


Image rate for square ground pixel @ aircraft speed 60 m/s (120 knots)



	VNIR	SWIR		
Camera specifications				
Spectrograph	High efficiency transmissive imaging spectrograph			
Spectral range	380 - 970 nm	970 - 2 500 nm		
Spectral resolution (Mean)*	3.5 nm	10 nm		
F/#		F/2.4		
Smile / Keystone	< 0.2 pixels			
Polarization sensitivity	Throughput practically independent of polarization			
Signal-to-noise ratio (peak)	600 - 1 000:1 **	1 050:1		
Spatial resolution	384 pixels			
Frame rate	Up to 100 Hz			
Integration time	Adjustable within frame period			
FOV	32.3°			
IFOV	0.084°			
Swath width	0.58 x altitude			
Altitude for 1m pixel size	660 m			
Electro mechanical shutter	Yes			
Detector	CMOS	Stirling cooled MCT		
Spectral binning options	2x	4x	8x	-
Number of spectral bands	348	174	87	274
Spectral sampling / band	1.7 nm	3.4 nm	6.8 nm	5.7 nm
Data interface	CameraLink 12-bit	CameraLink 16-bit		
Typical power consumption ***		150 W		
Maximum power consumption ***		500 W		
Environmental characteristics				
Storage temperature	- 20 ... +50 °C			
Operating temperature	+ 5 ... +40 °C, non-condensing			

*) Typical spectral resolution obtained by calculating mean data from several units. Exact spectral resolution may vary from unit to unit **) Depends on spectral binning ***) Complete system with DPU.

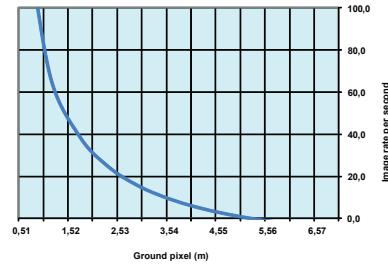