

SuperK COMPACT

Compact single mode white light laser

- Cost efficient broadband source
- High brightness and long lifetime
- Visible to IR light in one module
- Input pulse trigger
- Variable repetition rate
- Flexible accessory range
- Alternative to ASE sources, lamps, and SLEDs




SuperK COMPACT is a cost efficient turn-key supercontinuum white light source with a wide output spectrum that covers the entire 450-2400 nm region. The output is single mode with a brightness many orders of magnitude larger than that of other white light sources like incandescent lamps and with far more bandwidth than ASE sources or SLEDs.

The light is delivered in a single mode fiber terminated with either a standard FC/PC connector or our high quality collimator.

The SuperK COMPACT easily interfaces with the SuperK SPLIT and SuperK CONNECT fiber delivery accessory range, for easy delivery and filtering/splitting of the light.


The SuperK COMPACT can be found in laboratories around the World where it is the daily driver for many users within applications like component characterization, test & measurement, spectroscopy and OCT or simply as a general purpose laboratory white light source.

Typical output spectrum

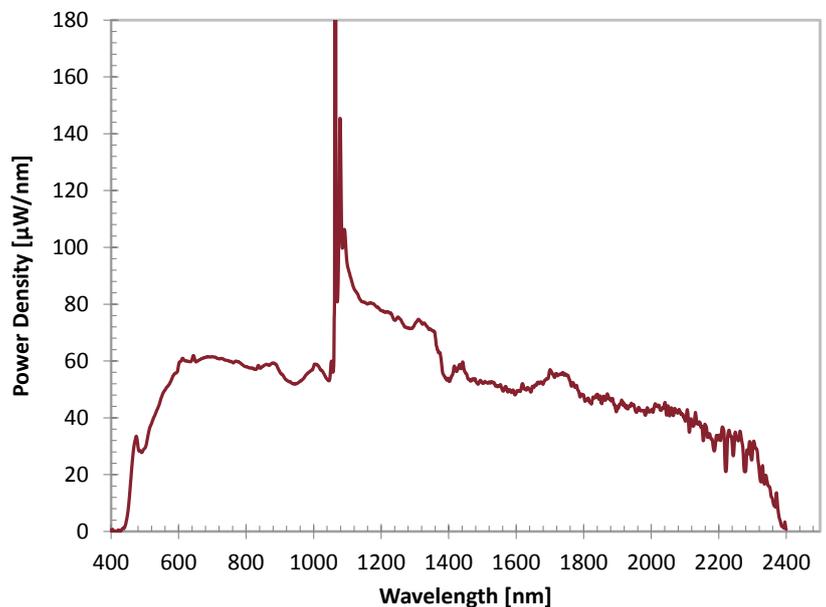

Applications

- SLED/ASE source alternative
- Fiber and grating characterization
- CWDM/DWDM component test
- Spectroscopy
- OCT

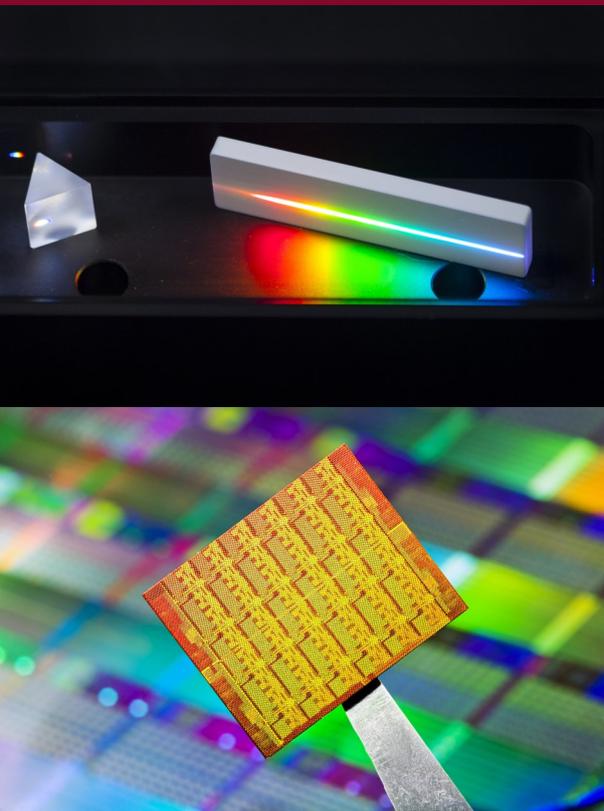

Specifications

Optical

Optical Spectral Range	450-2400 nm
Total output power	> 110 mW
Total VIS power (450-850 nm)	> 25 mW
Output power stability (1 hour)	<± 1.0 % (±0.5 % on request)
Spectral stability (600-1040 nm / 1100-1500 nm)	< 0.12 dB per hour / <0.14 dB per hour
Typical warm-up time (power stability)	~30 min (room temperature)
Repetition rate	Variable 1 Hz to minimum 20 kHz
Output pulse width	< 2 ns
Pulse-pulse jitter (Std. Dev.)	< 2 μs (rep rate dependent)
Output termination	Collimator, FC/PC or FC/APC connector
Beam diameter (collimated)	~1mm at 530nm ~2mm at 1100nm ~3mm at 2000nm
M ²	≤ 1.1
Polarization	Unpolarized
Beam output	Gaussian, single mode
Customization	Standard single mode fibers as output fiber


Mechanical/Electrical

Operation Voltage	100-240 V; 50-60 Hz
Power consumption	< 40 W
Computer interface	USB
Pulse signal output	Analog and digital
Trigger input	Standard and industrial (galvanically isolated)
Interlock connector	2-pin LEMO 0B
External bus connector	15-pin sub-D
System cooling	Air cooled
Dimensions (H x W x D)	93 x 221 x 332 mm
Weight	3.8 kg

Environmental

Operating temperature range	15-30 °C
Storage temperature range	5-50 °C (non condensing)
Humidity	20-80 % RH

All NKT Photonics products are produced under our quality management system certified in accordance with the ISO 9001:2008 standard.

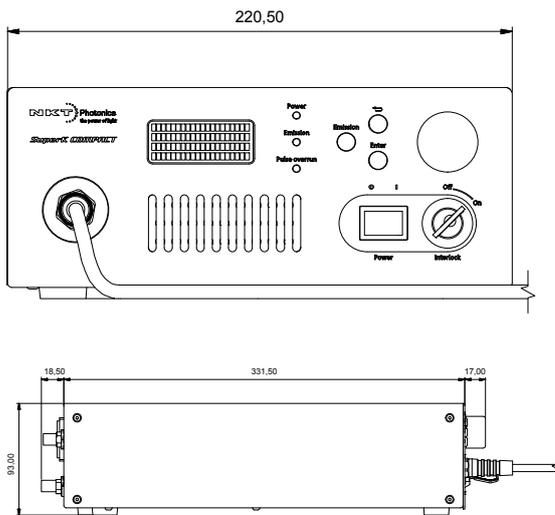

Other white light laser

SuperK EVO

New turn-key MHz supercontinuum laser with industry leading brightness covering the entire 400 -2400nm wavelength range. Used globally in a wide range of applications like Fluorescence Lifetime Imaging (FLIM), Time Correlated Single Photon Counting (TCSPC), Flow cytometry, Test and Measurement .



NKT Photonics A/S (Headquarters)
 Blokken 84, 3460 Birkerød, Denmark
 Phone: +45 4348 3900
 Fax: +45 4348 3901

NKT Photonics GmbH
 Schanzenstrasse 39, Bldg D9-D13
 51063 Cologne, Germany
 Phone: +49 221 99511-0
 Fax: +49 221 99511-650

NKT Photonics Inc.
 3514 N Vancouver Avenue, Suite 310
 Portland, OR 97227 • USA
 Phone: +1 (503) 444-8404
 Fax: +1 (503) 914-1664