




# FILTER CODE: UL-1005

<b>Filter</b>	Full and alignment protection
<b>Colour</b>	Green
<b>Material</b>	Polycarbonate
<b>VLТ</b>	42%
<b>Aiming beam wavelength T%(λ) &gt;10%</b>	470-650 nm

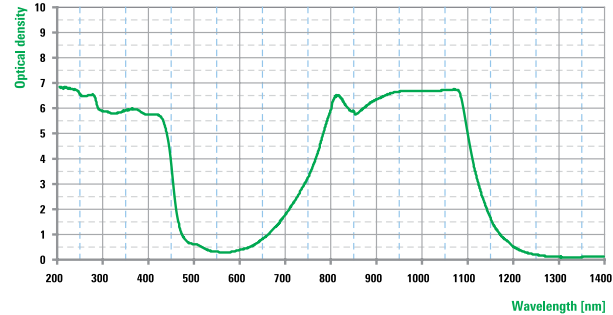

MODEL	561	562	559G	546	5X7	616
<b>FRAME STYLE</b>						
<b>ITEM CODE</b>	○ 561H.00.00.309 ● 561H.00.01.309	○ 562H.00.00.309 ● 562H.00.01.309	559G.00.00.309	546L.00.10.551	5X7L.00.00.651	NOT AVAILABLE

Wavelength	OD	561	562	559G
190	315	5	D LB5 IR LB3	D LB5 IR LB3
315	430	5	DIR LB5	DIR LB5
750	1100	3	DIR LB3	DIR LB3
775	1100	4	DIR LB4	DIR LB4
790	1090	5	DIR LB5	DIR LB5
920	1075	6	DIR LB6 M LB6Y	DIR LB6 M LB6Y
1000	1070	7	D LB6 IR LB7 M LB7Y	D LB6 IR LB7 M LB7Y
1030	1065	8	D LB6 IR LB8 M LB7Y	D LB6 IR LB8 M LB7Y
10600	6	DI LB4	DI LB4	DI LB4

Wavelength	OD	546
660	690	1
745	1115	3
770	1100	4
785	1085	5
800	825	6
885	1075	6
1000	1070	7
1030	1065	8
9000	11000	6

Wavelength	OD	5X7
660	675	1
675	690	2
715	1120	3
730	1115	4
745	1110	5
770	1090	6
1000	1070	7
1030	1065	8
9000	11000	6